

EQUIPMENT SHEET

GATEWAY

TRAILING SUCTION HOPPER DREDGER



CONSTRUCTION / CLASSIFICATION		
Built by	Merwede Shipyard B.V.	
Year of construction	2010	
Classification	BV # Hull # Mach, Hopperdredger. Unrestricted Navigation. Dredging within 15 miles from shore or within 20 miles from port; or dredging over 15 miles from shore with a significant wave height restriction to 3.0 m. # AUT-UMS	

FEATURES 2 Separate hoppers with pump room in between. Accommodation on fore ship. 1 Suction pipe with submersible dredge pump at starboard side. 2 Fixed deckcranes. Relative small draught.


MAIN DATA	
Length overall	143.53 m
Breadth	28.00 m
Moulded depth	13.50 m
Max. draught Int. load line	8.00 m
Max. draught dredging load li	ne 10.00 m
Carrying capacity (D.W.)	about 22,000 t
Hopper capacity	12,000 m ³
Suction pipe diameter	1 x 1,200 mm
Max. dredging depth	approx. 62.00 m
Discharge systems	Dumping through bottom doors (4), shore discharge and rainbow.
Sailing speed loaded	15.4 kn
Total installed power	13,870 kW
Sand pump output	Inboard dredge pump: 7,500 kW
	Submersible dredge pump: 3,500 kW
Jet pump output	2 x 1,250 kW
Pump ashore output	7,500 kW
Propulsion power sailing	2 x 6,000 kW
Bow thruster	2 x 700 kW






GATEWAY

TRAILING SUCTION HOPPER DREDGER

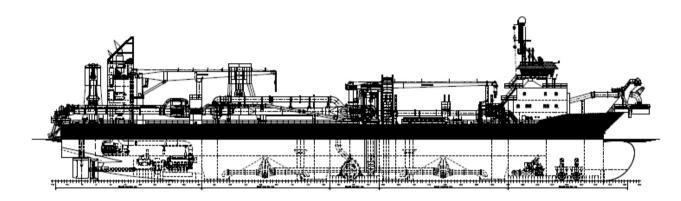

SIDE VIEW

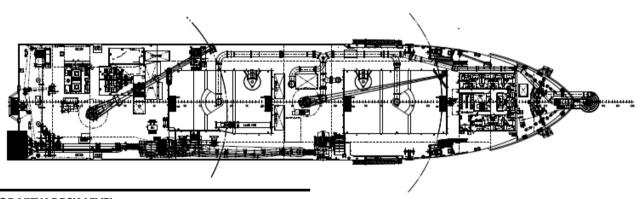

TOP VIEW DECK LEVEL

Boskalis

PO Box 43 3350 AA Papendrecht The Netherlands T +31 78 69 69 000 royal@boskalis.com