

EQUIPMENT SHEET

SMIT BORNEO
CRANE & ACCOMODATION BARGE



CONSTRUCTION/CLASSIFICATION

Year of conversion	2009
Classification (dual class)	GL
Certification	SPS

FEATURES

Accommodation	152 p
8 point Mooring system	
Payout speed	300 m/min
Main Supply	3 x 500 kVA
Helideck (S61N)	VA

CONSTRUCTION SERVICES


Mooring & Riser Installations
Subsea installations
Accommodation support
Pipelay

MAIN DATA


Deadweight	5244 t
Length overall	110 m
Breadth	30 m
Depth	7.6 m
Clear deck space	1900 m ²
Deck loading	15 t/m ²

CRANE

500 t Liebherr Litronic pedestal crane
500 t @ 16m
150 t @ 44 m auxiliary crane

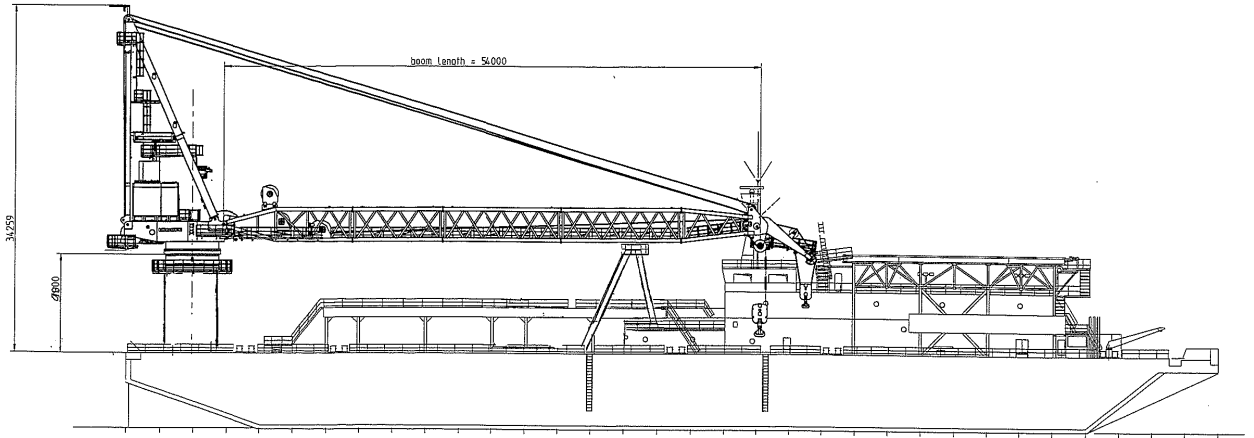

SIDE VIEW

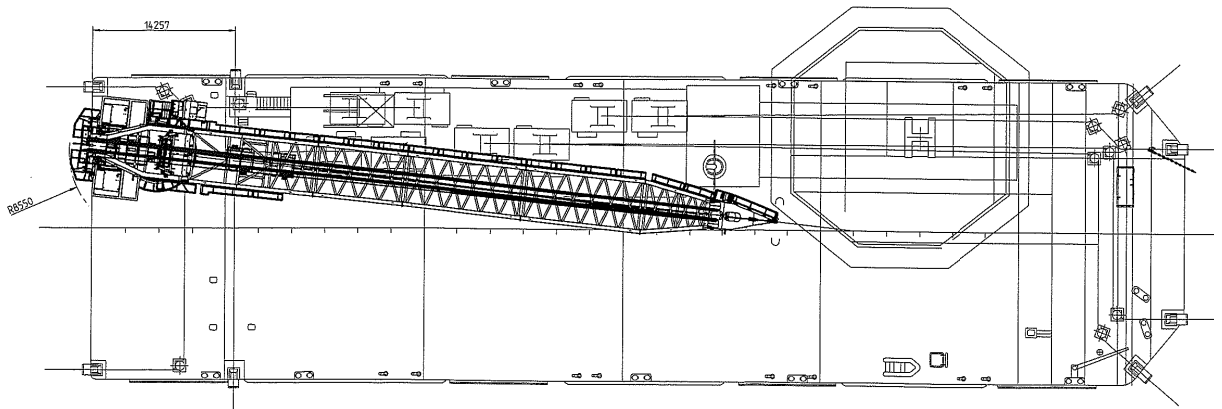

TOP VIEW DECK LEVEL