



CONSTRUCTION/CLASSIFICATION

Year of construction	2006
Classification	American Bureau of Shipping A1, AH, FiFi 1, (E), AMS, ACCU, DPS-2
IMO number	9322592

FEATURES


Air-conditioned accommodation for 46 persons
Deck area (aft) 450 m ² , mezzanine deck area 128m ²
Bunker capacity: 950 m ³ . Supply capacity: Ballast/drillwater 379 m ³ , Liquid mud 450 m ³ , Foam 26.4 m ³ , Fresh water 577 m ³ , Dry bulk 6 x 45 m ³ .
Capacity fire-fighting monitors: 2 x 1200 m ³ /hr
Waterspray available
Crane 1,8T SWL. @ 9 m outreach

TOWING / ANCHOR HANDLING


Towing / anchor-handling winch: hydraulic	
Waterfall (3 drums)	400 T. brake load
Upper drum	Line pull 150 T. @ 6,8 m/min. on 1 st layer
Middle drum	Line pull 150 T. @ 6,8 m/min. on 1 st layer
Lower drum	Line pull 150 T. @ 6,8 m/min. on 1 st layer
Wildcats	2 x 3,25 inch - 120 T. pull
Rig chain lockers	2 x 120 m ³ - 240 m ³
Stern roller	5 m x 2,5 m, 300 SWL

MAIN DATA

Gross tonnage	2,606
Length overall	70.90 m
Breadth	16.00 m
Max. draught	5.70 m
Main engines	2 x Wärtsilä 9R32
Total power	7,380 kW
Propulsion	2 x controllable pitch Conventional
Bow thruster	2 x 550 kW
Stern thruster	1 x 550 kW
Positioning	DP 2
Speed ahead (max.)	13.5 kn
Speed ahead (eco.)	9 kn
Bollard pull	120 t

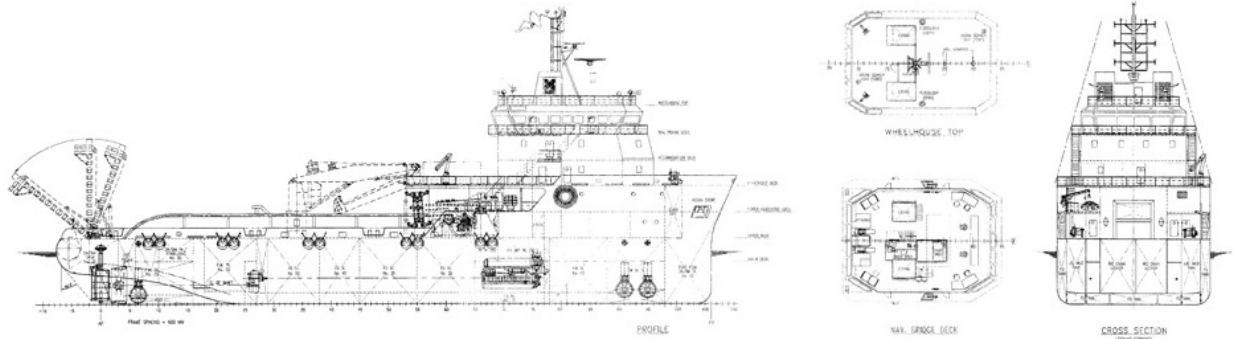

SIDE VIEW

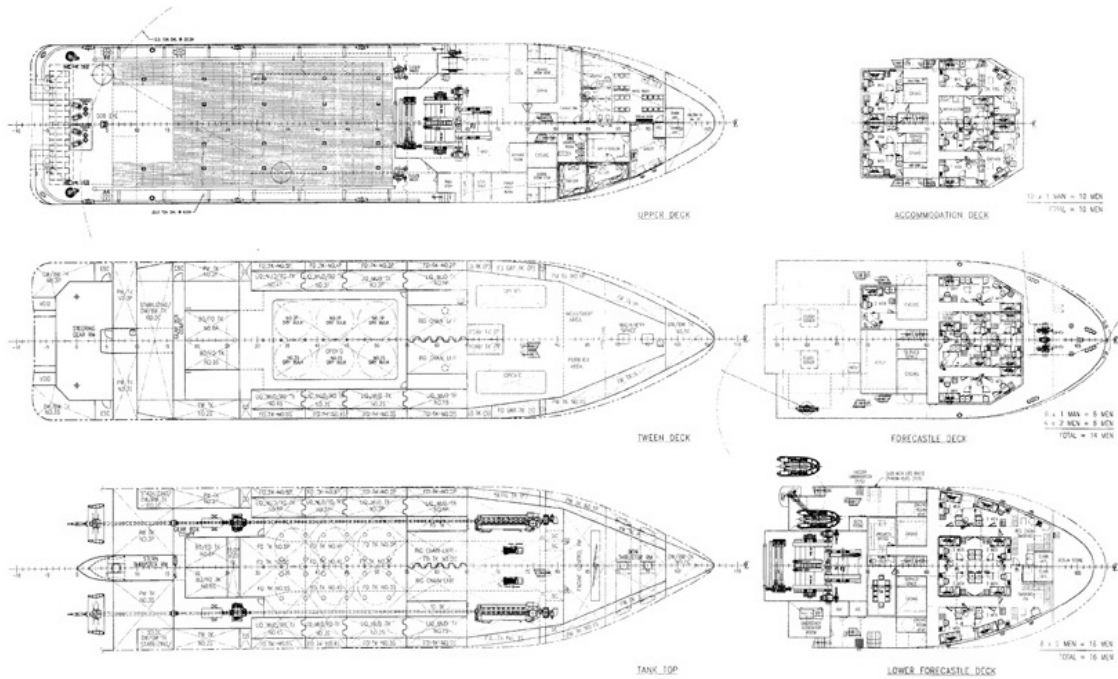

TOP VIEW DECK LEVEL

Royal Boskalis Westminster N.V.
PO Box 43
3350 AA Papendrecht
The Netherlands
T +31 78 69 69 000
F +31 78 69 69 555
royal@boskalis.com
www.boskalis.com