

EQUIPMENT SHEET

BEAR

OFFSHORE VESSELS /
ANCHOR HANDLING TUG SUPPLY (AHTS)



CONSTRUCTION/CLASSIFICATION

Year of construction	1999
Classification	Bureau Veritas I ✕ HULL ✕ MACH Anchor handling vessel Supply vessel Unrestricted navigation, AUT-UMS, ICE, DYNAPOS AM/AT R
IMO number	9185932
Call sign	ORRV
Flag	Belgian
Port of registry	Antwerp
Trading area	Worldwide/unrestricted

FEATURES

Accommodation	24 berths 8 x single cabins 4 x double cabins 2 x four person cabins
Bunker capacity	fuel 1545 m ³ fresh water 522 m ³
Other tanks for cargo	Drill water 925 m ³ Base oil 167 m ³ Brine 582 m ³ Dry bulk 240 m ³
Positioning	Kongsberg DP II (K-pos)

MAIN DATA

Length overall	73.50 m
Breadth moulded	16.40 m
Depth moulded	8.00 m
Max draught	6.90 m
Deadweight at max draught	2,900 t
Gross tonnage	2,590 GT
Bollard pull ahead	187 t
Speed max	15 kn
Speed economic	10 kn
Deck area	550 m ²
Max deck cargo	1,000 t
Deck strength	5-10 t/m ²

PROPULSION AND MAIN SYSTEMS

Main engine set 1	1 x 5,530 kW 750 rpm
Main engine set 2	1 x 5,530 kW 750 rpm
Main propulsion	11,060 kW
Steering gear	2 x flaprudder
Forward azimuth	1 x 800 kW, retractable
Bow thruster	1 x 800 kW, tunnel
Stern thruster	1 x 800 kW, tunnel

BEAR


OFFSHORE VESSELS /
ANCHOR HANDLING TUG SUPPLY (AHTS)

DECK EQUIPMENT


Towing and anchor handling winches	Brattvaag SL 300 t pull / 400 t break 2 x 2,000 m of 76 mm wire
Rope reels	Brattvaag 20 t 2 x 2,000 m of 76 mm
Forward winch	Brattvaag 16.4 t winlass
Capstan winches	Brattvaag 5 t
Tugger winches	Brattvaag 2 x 10 t

DECK EQUIPMENT

Stern roller	L: 6.0 m x 3.0 m diam. SWL 500 t
Crane	5 t @ 14 m
Towing pins	Karmoy KWT 350-800 / SWL 240 t
Karmoy pins	2 x 500 t SWL
Gypsy wheels	2 x 76 mm / 2 x 84 mm
Chain lockers	capacity 2 x 130 m ³

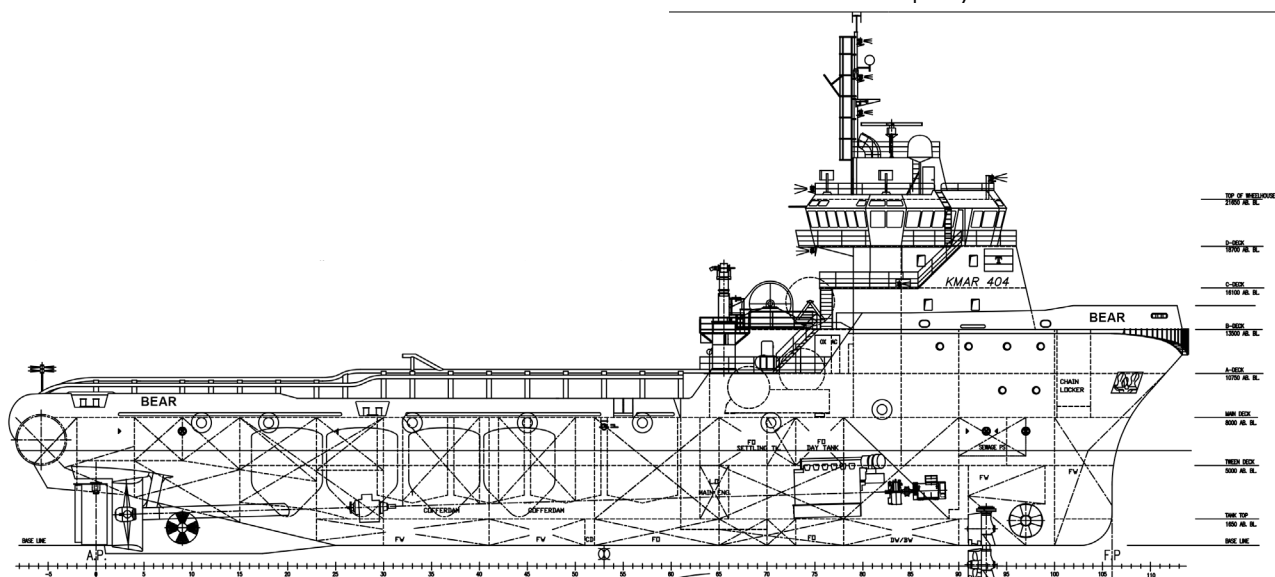

SIDE VIEW

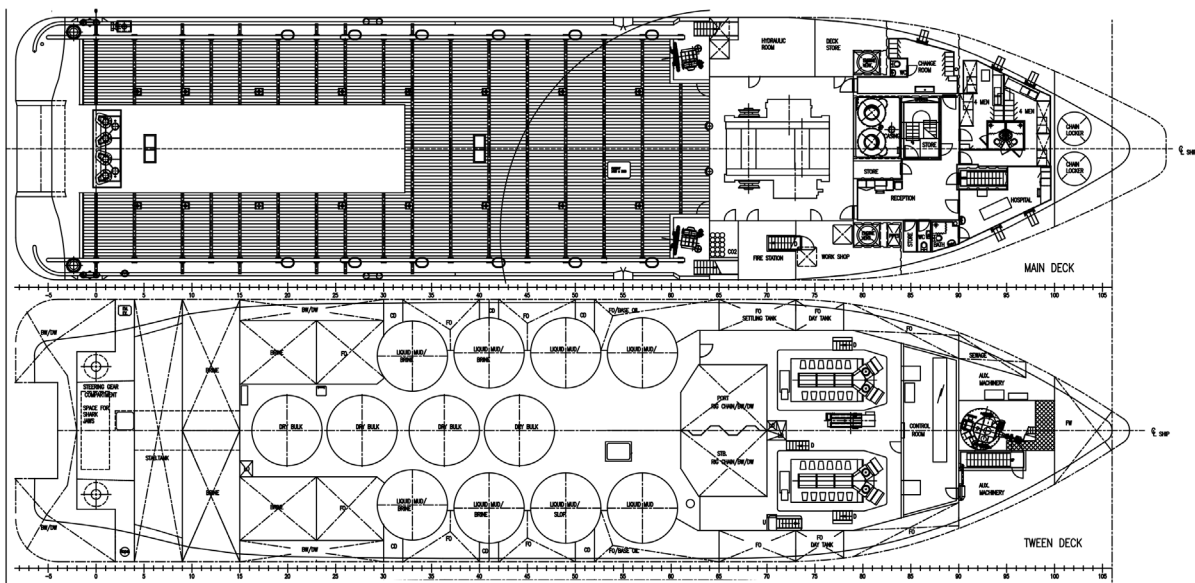

TOP VIEW DECK LEVEL/TWEEN DECK

Boskalis

PO Box 43
3350 AA Papendrecht
The Netherlands
T +31 78 69 69 000
offshore.energy@boskalis.com
www.boskalis.com/offshore