

EQUIPMENT SHEET

BOKA OCEAN CONSTRUCTION SUPPORT VESSEL



Bow thruster

CONSTRUCTION / CLASSIFICATION		
Built by	Metalships & Docks, Vigo, Spain	
Year of construction	2010	
Classification	DNV +1A1, DYNPOS-AUTR, EO, DK(+), CLEAN, CLEAN DESIGN, COMF-V(3), NAUT-OSV, HELDK, SPS 2008.	
Flag	Malta	
Port of registry	Valletta	
FEATURES		
Accommodation	120 berths, 50 x single cabins and 35 x double cabins	
Client & office facilities	1 x offline office on 01 ACC 1 x online office on 04 ACC 1 x conference room 1 x briefing room/cinema	
Hospital	2 berths	
Mess room	60 seats	
Recreation room	50 seats	
Conference room	10 seats	
Reception room	Reception room for helideck	
Recreation facilities	Gymnasium, sauna and cinema	

CAPACITIES	
Bunker capacity	Approx. 1,500 m ³
Other tanks for cargo	Potable water: approx. 600 m³ Ballast water: approx. 7,600 m³
Freshwater gen.	2 of each 25 m³ per day
MAIN DATA	
Length overall	133.6/136.6 m with helideck
Length BP	120.4 m
Beam	27.0 m
Draft max	6.85 m
Depth main deck	9.7 m (2,360 m²)
Deadweight	Approx. 10,000 t
Main deck area	Approx. 2,360 m ²
Deck strength over all	10 t/m ²
Deck hatches	Two 4 m x 3 m hatches
PROPULSION AND MA	AIN SYSTEM
Main engine (electric driven)	Wärtsilä, 4 x 3,360 kW
Propulsion	2 x Azipull thrusters, RR Ulstein Aquamaster, each 3,500 kW

1x RR swing up thruster 1,500 kW 2x RR tunnel thrusters 1,500 kW each




BOKA OCEAN

CONSTRUCTION SUPPORT VESSEL


ELECTRIC POWER GENERATION		
Main generator	4 x 3,230 kW	
Harbour generator	595 kW	
DYNAMIC POSITION	NING SYSTEM	
DP System	DP2 - Kongsberg Maritime K-Pos 21	
Class	DnV DYNPOS-AUTR, complies NMD class 2	
Reference system	2 x Kongsberg HiPAP 501 1 x Kongsberg Seatex DPS 132 1 x Kongsberg Seatex DPS 116 LTW Taut Wire Mk15 Kongsberg RADius 1000 Dual Fan Beam	
ERN	(97, 96, 87, 22)	
ROV SYSTEM		
ROV (optional)	2 x WROV 150 BHP	

DECK EQUIPMENT	
Main crane Auxiliary hoist	MacGregor AHC Offshore Knuckle Jib Crane 250 t @ 10 m, 70 t @ 35 m Main: 2,570 m, Whip: 1,815 m wire 20 t @ 36 m
Aft. crane Auxiliary hoist	NOV AHC Offshore Knuckle Jib Crane 1/2 Falls, 90/110 t @ 12 m 30/30 t @ 30 m, Main: 1,895 m, Whip: 1,465 m wire 10 t @ 30 m
Provision crane	SWL 5 t @ 12 m
Moonpool	7.2 m x 7.2 m with hatch
Mooring winch FWD Mooring winch AFT	2x 20.6 t 8-16 m/min @ first layer 2x 15 t 15 m/min @ first layer (low speed) 2x 4.8 t 46 m/min @ first layer (high speed)
Stabilising equipment	2 x passive roll reduction tanks 2 x anti heeling systems

HELIDECK	
Size	D-Value 20.88 m (size 26.1 m) Suitable for Sikorsky S-92 (12.8 t)

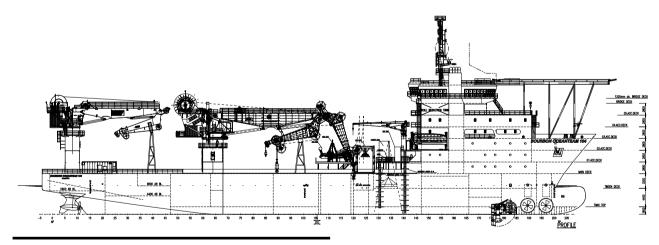


SIDE VIEW

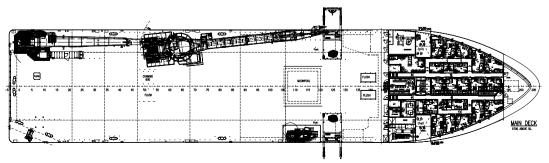




BOKA OCEAN

CONSTRUCTION SUPPORT VESSEL

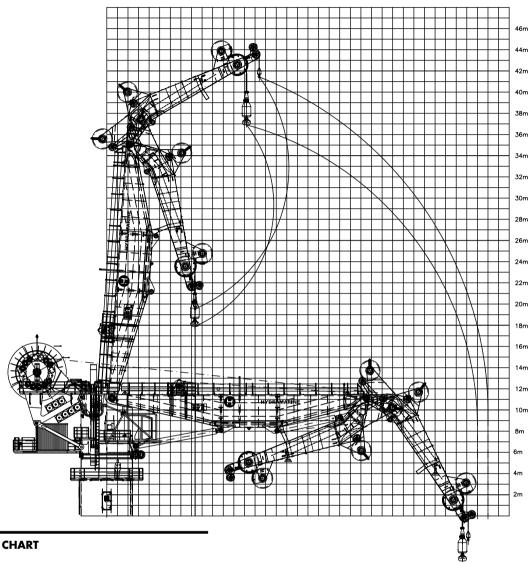

250 T CRANE LOAD CHART

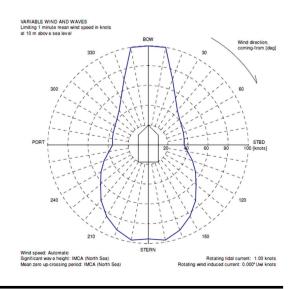

Boskalis

PO Box 43 3350 AA Papendrecht The Netherlands T +31 78 69 69 000 offshore.energy@boskalis.com www.boskalis.com/offshore