

EQUIPMENT SHEET

TAKLIFT 6
FLOATING SHEERLEG



CONSTRUCTION/CLASSIFICATION

Registration	Singapore
Classification	GL ✕ GL @ 100 A4 MC
Call sign	9V5979

ANCHOR WINCHES


Aft	1 x 10 t capacity 235 m of 56 mm Ø chain
-----	---

MOORING WINCHES


Aft	3 x 10/5 t capacity 220 m of 28 mm Ø wire rope 2 x 30/10 t capacity 1000 m of 50 mm Ø wire rope
Forward	3 x 10/5 t capacity 220 m of 28 mm Ø wire rope 2 x 30/10 t capacity 1000 m of 50 mm Ø wire rope

MAIN DATA

Gross tonnage	3,297 R.T.
Nett tonnage	989 R.T.
Length overall	72,56 m
Beam overall	30.50 m
Depth	5.50 m
Min. draught	2.50
Max. draught	4.90 m
Sailing height min.	40.00 m
Propulsion	2 x 480 kW
Bowthruster	2 x 184 kW

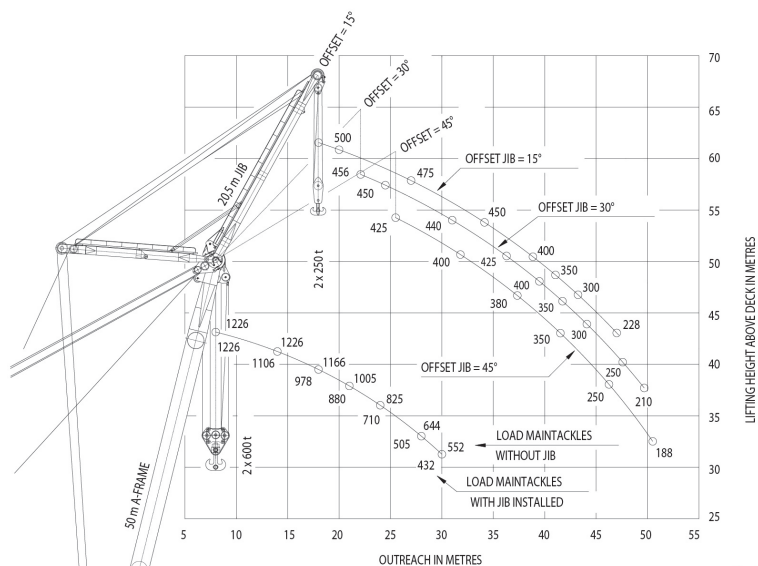

- Both main tackles and jib tackles can operate together, load capacity on request
- Loads in metric tonnes [t]
- Using deck tackles and main tackles together, loads upto 1600 t can be raised to water level

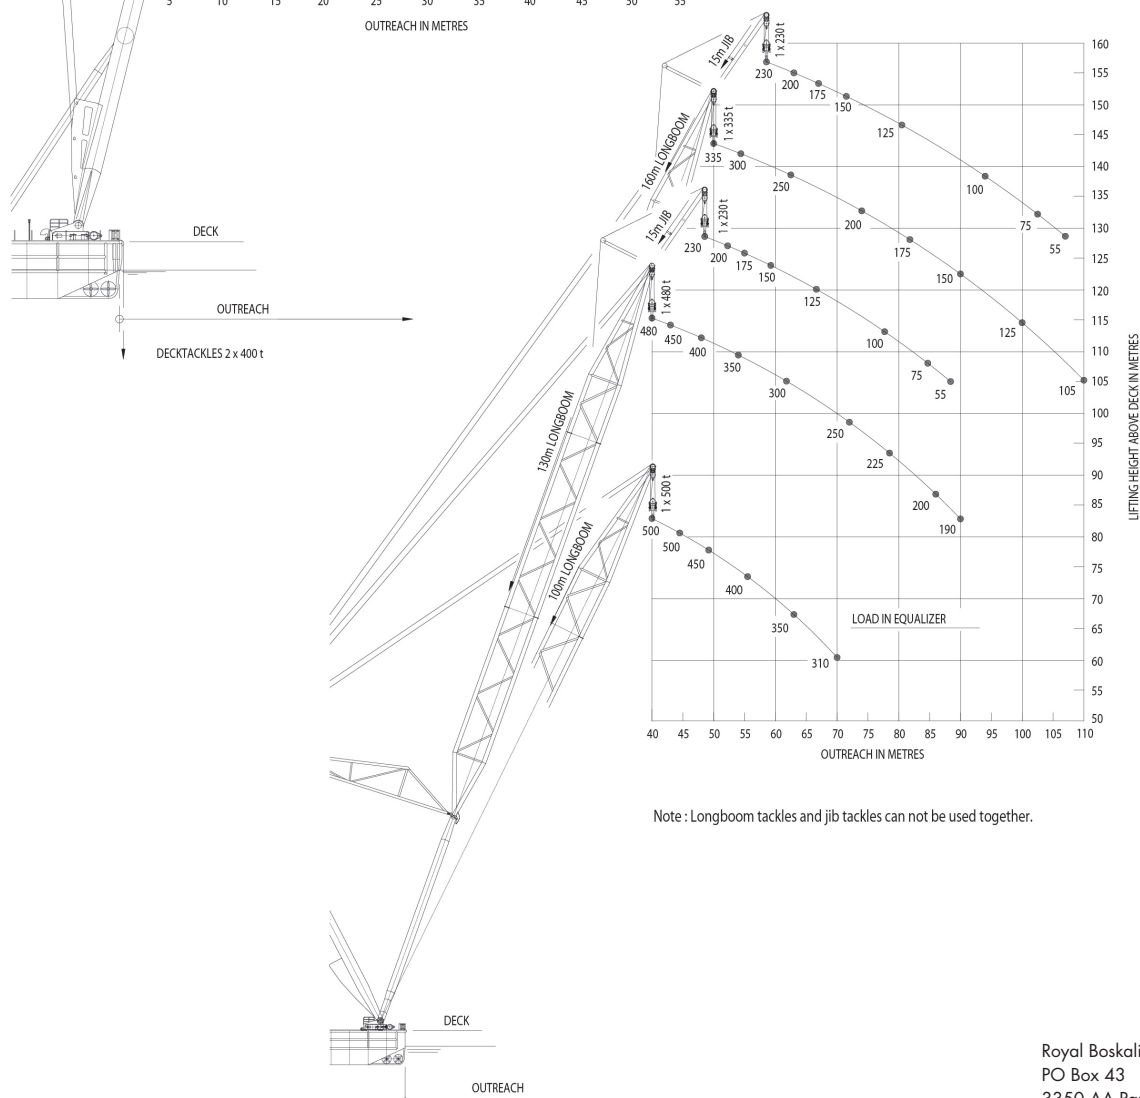

Note : Longboom tackles and jib tackles can not be used together.

CAPACITY DIAGRAM

Royal Boskalis Westminster N.V.
PO Box 43
3350 AA Papendrecht
The Netherlands
T +31 78 69 69 000
F +31 78 69 69 555
royal@boskalis.com
www.boskalis.com