

# EQUIPMENT SHEET

TRANDWAY

TRAILING SUCTION HOPPER DREDGER



CONSTRUCTION / CLASSIFICATION		
Built by	Shipkits B.V.	
Year of construction	2014	
Classification	I № HULL № MACH № Hopperdredger. Unrestricted Navigation. Dredging within 15 miles from shore or within 20 miles from port; or dredging over 15 miles from shore with a significant wave height restriction to 2.5 m. № AUT-UMS	

FEATURES	
Degassing system installed.	
Open bottom doors remain above the flat bottom of the vessel enabling very shallow dumping.	
Highly manoeuvrable using rudder propellers.	
Fully computerised engine room with certificate for unattende operation.	
Automatic discharge valve can be fitted into the overflow.	
Discharging through bottom doors, shore discharge and rainbow nozzle	

Fully compliant with the latest international requirements such as modern engines with low emissions.


State of the art technology to minimize environmental impacts.

MAIN DATA	
Gross tonnage	4,320 GT
Length overall	92.10 m
L.p.p.	84.87 m
Breadth	19,00 m
Moulded depth	7.25 m
Max. draught T-Summer	6.164 m/ DWT 5723
Max. draught T-Dredging	7.080 m/ DWT 7160
Hopper capacity	4,500 m <sup>3</sup>
Suction pipe diameter	900 mm
Max. dredging depth	30 m
Sailing speed loaded	11 kn
Total installed power	9,472 kW
Sand pump output	1,825 kW
Jet pump output	2 x 746 kW
Pump ashore output	3,650 kW
Propulsion power sailing	2x 1,491 kW
Bow thruster	500 kW




#### **STRANDWAY**

### TRAILING SUCTION HOPPER DREDGER

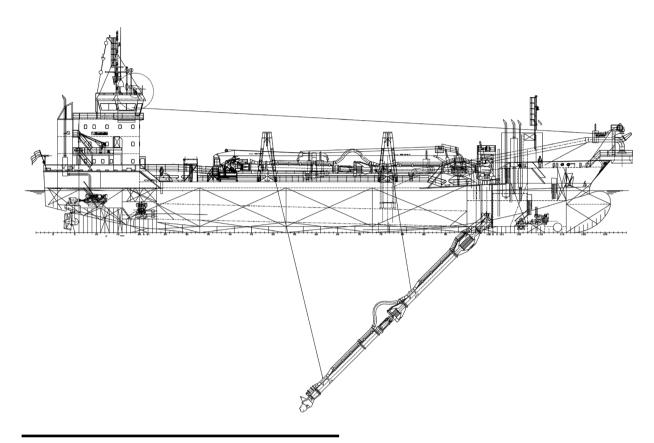

## SIDE VIEW

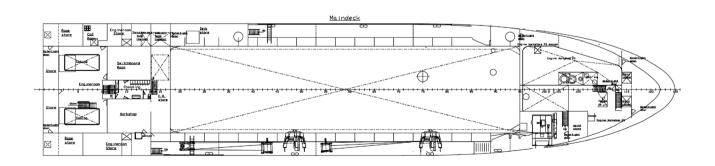

## **TOP VIEW DECK LEVEL**

#### Boskalis

PO Box 43 3350 AA Papendrecht The Netherlands T +31 78 69 69 000 royal@boskalis.com